

SAMSUNG SMART SIGNAGE DCH SERIES

Capture viewers with slim design and optimized performance for 16/7




EASILY ELEVATE BUSINESS BRANDING AND MESSAGING WITH BRILLIANT AND DURABLE SIGNAGE

DCH Series displays deliver industry-leading picture quality, proven Samsung technology and a wide array of sizing options for adaptable and dependable business usage to meet various business needs. The displays offer reliable 16/7 usage to ensure that your business messages are efficiently conveyed. Plus, 350 nit brightness and crystal clear image quality enable business owners to captivate their customers.



CONTROL DISPLAYS IN MULTIPLE LOCATIONS EASILY AND INSTANTLY

MagiInfo Lite solution that comes with the embedded media player extends the remote content management over network through MagiInfo server. Media contents of the USB memory stick plugged in to the back of the DCH Series displays can be scheduled to play from a remote PC. The connection to MagiInfo server allows remote monitoring and management of the DCH Series displays. Device information, content playback schedules, network data monitoring, time scheduling, alarms and various controls are all available remotely.

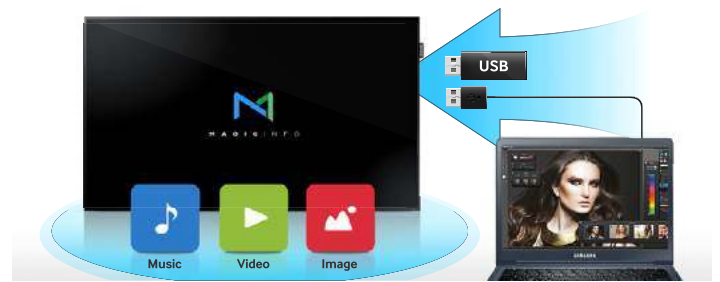

CONTENT AUTO PLAY IN USB MEMORY OR INTERNAL MEMORY

MagiInfo Lite Player uses a sophisticated technology to play a huge range of content including video, images, photos on demand, or from a schedule. Customers can easily play files from, or transfer between, the large internal memory or external USB devices plugged into the in-built port. The MagiInfoSlide folder on the USB memory has content that is listed in alphabetical order which is easier and convenient to use as it does not require separate schedules.



EASILY MANAGE DIGITAL SIGNAGE WITH A VERSATILE CONNECTIVITY

Connect the display to other digital signage easily with interfaces based on your specific needs. The displays provide not only the essential connections businesses use the most but support for a wide range of source device types. Interfaces include HDMI, DVI, D-sub, Component and Composite input as well as RS-232C and RJ45 for extensive connectivity. In addition, DCH series has a space to attach SBB player, which can transform the signage into all-inclusive digital signage solutions.

SAMSUNG

SPECIFICATIONS

MODEL		DC49H		
Panel	Diagonal Size	Class	49	
		Measured	48.5" / 123.2cm	
	Type		60Hz E-LED BLU	
	Resolution		1920x1080 (16:9)	
	Pixel Pitch(mm)		0.186(H) x 0.559(V)	
	Active Display Area(mm)		1073.78(H) x 604.00(V)	
	Brightness(Typ.)		350nit	
	Contrast Ratio(Typ.)		5000:1	
	Viewing Angle(H/V)		178:178	
	Response Time(G-to-G)		8ms	
	Display Colors		16.7 M	
	Color Gamut		72%	
	Operation Hour		16/7	
	Haze		2%	
Display	Dynamic C/R		MEGA	
	H-Scanning Frequency		30 ~ 81kHz	
	V-Scanning Frequency		48 ~ 75Hz	
	Maximum Pixel Frequency		148.5MHz	
Sound	Speaker Type		Built in Speaker(10W + 10W)	
Connectivity	INPUT	RGB	DVI-I	
		VIDEO	HDMI 1.4 (2), Component(CVBS Common)	
		HDCP	HDCP1.4	
		AUDIO	Stereo Mini Jack, RGB/DVI/HDMI/Component Audio (Common)	
		USB	USB 2.0 x 1	
	OUTPUT	RGB	N/A	
		VIDEO	N/A	
		AUDIO	Stereo Mini Jack	
		Power Out	N/A	
		USB	N/A	
	EXTERNAL CONTROL		RS232C(in) thru stereo jack, RJ45	
	EXTERNAL SENSOR		N/A	
	Tuner		Yes(only for NA/KR)	
Power	Type		Internal	
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	Power Consumption	Max[W/h]		99
		Typical [W/h]		(W/W)52, (US)45, (KR)66
		BTU(Max)		337.59
		Sleep mode		0.5
Off mode			0	
Mechanical Spec	Dimension (mm)	Set	1096.9 X 629.1 X 30.5	
		Package	1214 x 721 x 157	
	Weight (kg)	Set	13.1kg	
		Package	17.4	
	VESA Mount		400*400mm	
	Protection Glass		N/A	
Stand Type		Foot Stand (Optional)		
Bezel Width (mm)		9.0 (Top/Side), 11.0 (Bottom)		
Operation	Operating Temperature		0°C~ 40°C	
	Humidity		10~80%	

MODEL		DC49H		
Feature	Key		Slim & Light LFD with Built-in MagicInfo Lite	
	Special	H/W		Super Clear Coating, Temperature Sensor, Pivot Display, Button Lock, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W x 2)
		S/W		Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play (DDC2B), Built In MagicInfo Lite, Firmware Update by Network
	Internal Player (Embedded H/W)	Processor		MIPS 24K
		On-Chip Cache Memory		L1 : 16KB/16KB L2 : 128KB
		Clock Speed		650MHz
		Main Memory Interface		512MB
		Graphics		N/A
		Storage (FDM)		179MB
		Multimedia		N/A
		IO Ports		N/A
	Operating System		Samsung Proprietary OS (VDLinux)	
	Safety			CB (Europe) : IEC60950-1/EN60950-1, CCC (China) : GB4943.1-2011, PSB (Singapore) : PSB+IEC60950-1, IRAM (Argentina) : IRAM+IEC60950-1, SASO (Saudi Arabia) : SASO+IEC60950-1, BIS(India) : IEC60950-1 / IS13252, NOM(Mexico) : Tuner: NOM-001-SCFI-1993, Tunerless : NOM-019-SCFI-1998, KC(Korea) : K 60950-1, EAC(Russia) : EAC+IEC60950-1, INMETRO(Brazil) : INMETRO+IEC60950-1, BSMI(Taiwan) : BSMI+IEC60950-1, RCM(Australia) : IEC60950-1/AS/NZS60950-1, CSA (Canada) : cUL, UL(USA) : cUL6095
Certification			FCC (USA) Part 15, Subpart B Class A, CE (Europe) : EN55022:2006+A1:2007,EN55024:1998+A1:2001+A2:2003, VCCI (Japan) : VCCI V-3 /2010.04 Class A, KCC/EK (Korea) : Tuner : KN13 / KN20,Tunerless : KN22 / KN24, BSMI (Taiwan) : CNS13438 (ITE EMI) Class A /CNS13439 (AV EMI) / CNS14409 (AV EMS) / CNS14972 (Digital), C-Tick (Australia) : AS/NZS CISPR22:2009, CCC(China) :GB9254-2008,GB17625.1-2012, GOST(Russia/CIS) : GOST R 51317 Series,GOST 22505-97, EN55022:2006+A1:2007,EN55024:1998+A1:2001+A2:	
Accessories	Included		Quick Setup Guide, Regulatory Guide, Warranty Card, Power Cord, Remote Controller, Batteries, RS232C(IN) adapter	
	Optional	Stand		STN-L4655E
		Mount		WMN4270SD
	Specialty		CML450H	
	Media Player		SBB	

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit Samsung Newsroom at <http://news.samsung.com>.

SMART Signage

For more information about Samsung SMART Signage, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2017 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea